

VAISHAL PATLIPUTRA DUGDH UTPADAK SAHKARI SANGH LTD

# PATNA DAIRY PROJECT

Feeder Balancing Dairy Complex, Phulwarisharif, Patna – 801505

Phone – 0612-2252553, 2252542, 2251622, Fax-2250325

Email :- vpmu.pur@gmail.com

PDP: PUR: 2578

Dated: 01.08.2022

## TENDER NOTICE

Sealed Tender is invited from experienced party for **civil construction work and false ceiling of Paneer Packing area at Feeder Balancing Dairy, Patna**. The details scope of work as per BOQ with diagrams attached herewith.

Interested parties may submit their quotation latest by **14.08.2022** by 5.00 pm in sealed envelope addressed to Managing Director, VPDUSS Ltd., Patna super scribing on the top of the envelope Tiles "**Construction work and false ceiling of Paneer Packing area at FBD, Patna.**"

Bidder must be registered for civil work in Bihar Govt or COMFED, Patna.



Manager (MM)\


Enclosure: As above

Note: 1) The rate should be all inclusive FOR FBD  
2) All the legal document i.e. Photo, ID Proof  
Service Tax papers, etc (Xerox is to be enclosed)

CC: Notice Board, FBD, CFF, HCC  
Patnadairy.org

**BILL OF QUANTITIES(BOQ)****WORK:- civil work in enclosing paneer packing area**

S.No	SOR 2022	NAME OF WORK	UNIT	QTY.	RATE	AMOUNT
1	p-120/6.18.4A	Half brick masonry with bricks of class designation 100A in foundations and plinth in cement mortar 1:4(1 cement : 4 coarse sand)	sqm	12.625	599.3	7566.1625
2	P-185/11.36	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS:15622(Thickness to be specified by the manufacture)of approved make in all colours, shades except burgundy,bottle green ,black of any size as approved by Engineer-in-charge in skirting,risers of steps and dados over 12 mm thick bed of cement mortar 1:3(1cement:3coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm including pointing in white cement mixed with pigment of matching shade complete.	SQM	27.27	795	21679.65
3	P-306/21.1	Providing and fixing aluminium work for partitions with extruded built up appropriate z section in aluminium snap beading of powder coated aluminium(minimum thickness of powder coating 50 micron) for glazing including necessary filling up the gaps at the junctions i.e at top,bottom and sides with required EPDM rubber/neoprene gasket etc. as per architectural drawings				0
4	p-306/21.1.1	Providing and fixing partitions from powder coated aluminium of 50 micron(jindal make OR ANY OTHER EQUIVALENT MAKE) for FIXED portion	Kg	118.916	386.1	45913.42899
5	p-306/21.1.2.1	Providing and fixing partitions from powder coated aluminium of 50 micron(jindal make OR ANY OTHER EQUIVALENT MAKE) for movable portion	Kg	40.246	447.2	17998.0112
6	P-307/21.3.2	Providing and fixing glazing in aluminium partitions with EPDM rubber/neoprene gasket etc. Complete as per drawings with float glass panes of 4.0 mm thickness	SQM	16.95	1115.1	18900.945
7	p-152/9.100.1	Providing and fixing aluminium handles of 125mm ,ISI marked,anodised(anodic coating not less than grade AC10 as per IS:1868) transparent or dyed to required colour or shade with necessary screws etc. Complete	Each	1	57.1	57.1

  
28/07/2022




8	p-152/ 9.103	providing and fixing bright finished brass 100mm mortice latch and lock,ISI marked,with six levers and a pair of anodised (anodic coating not less than grade AC 10 as per IS:1868) aluminium lever handles of approved quality with necessary screws etc. Complete	Each	1	655.4	655.4
9	p-151/ 9.97.1	Providing and fixing aluminium tower bolts of 300x10mm ,ISI marked,anodised(anodic coating not less than grade AC10 as per IS:1868) transparent or dyed to required colour or shade with necessary screws etc. Complete	Each	1	111.4	111.4
10	p-150/9.84	Providing and fixing aluminium extruded section body tubular type universal hydraulic door closer	Each	1	810.1	810.1
11	p-197/ 12.60.2	Providing and fixing false ceiling with 12 mm thick plain/or with design ceiling of BWP type phenol formaldehyde synthetic resin bonded pressed particle board conforming to IS:3087 including all fitting accessories AS PER SOR 12.60.2 specifications	Sqm	25.5	670.9	17107.95
<b>ESTIMATED COST WITHOUT CARRIAGE</b>						<b>130800.1477</b>
12	<b>Section - 9.0 CARRIAGE OF MATERIALS &amp; Difference of Cost of Materials</b>					
	<i>I</i>	<i>Carriage of Materials</i>				
	<i>b</i>	<i>Coarse sand 45km.</i>	<i>Cum.</i>	<i>0.586</i>	<i>776.22</i>	<i>454.685</i>
	<i>c</i>	<i>Bricks 8km</i>	<i>1000No.</i>	<i>0.780</i>	<i>1177.60</i>	<i>918.050</i>
	<i>e</i>	<i>Cement 1 km.</i>	<i>Tonne</i>	<i>0.153</i>	<i>247.10</i>	<i>37.849</i>
	<i>II</i>	<i>Difference of Cost of Materials</i>				<i>0.000</i>
	<i>1</i>	<i>Bricks</i>	<i>1000No.</i>	<i>0.780</i>	<i>317.40</i>	<i>247.443</i>
	<i>2</i>	<i>Cement</i>	<i>Tonne</i>	<i>0.153</i>	<i>207.00</i>	<i>31.707</i>
<b>CARRIAGE CHARGE</b>					<b>Rs.</b>	<b>1,689.734</b>
<b>GROSS TOTAL(SAY)=</b>						<b>132,490</b>
<b>Rs One Lakh Thirty Two Thousand Four Hundred Ninty only</b>						

**I AGREE & READY TO DO THIS WORK**

Sl no	Description	Rate Quoted by bidder	
		In Numeric	In words
1.0	ON THE GIVEN B.O.Q RATE		
2.0	ABOVE THE B.O.Q RATE(PRESENT)		
3.0	BELOW THE B.O.Q RATE(PRESENT)		

Signature of client with seal

Signature of contractor with seal

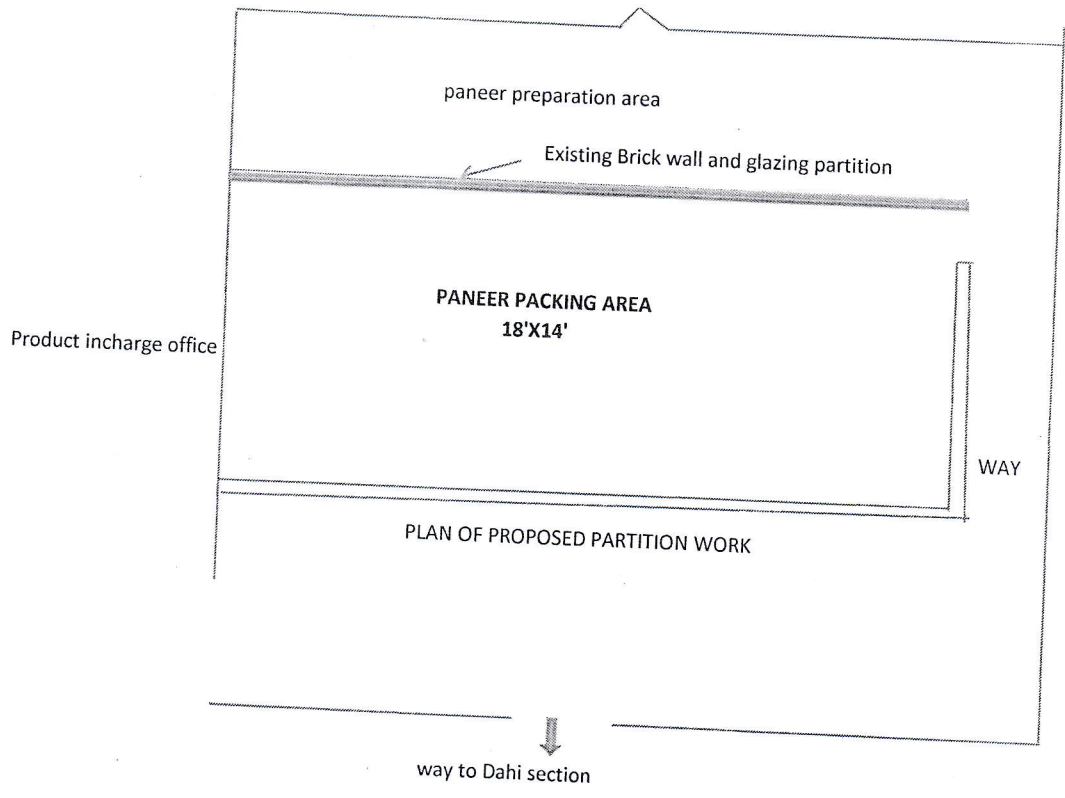

*[Handwritten signature]*

*[Handwritten signature]*